

NO FLOW IN FLOW[®] LLC **MANHOLE INSERTS**

To insure proper fit, No Flow In Flow Inserts are manufactured to specific measurements provided by the customer. These measurements are obtained according to the following diagrams. Exact measurements are required from the purchaser to accurately manufacture the correct size insert.


Sizing Requirements: Identify which style of counter weight to ensure proper fit. Style “A” is designed with vertical/straight counterweight. Style “B” is tapered to the center from the outside edge of the lid. *Please enclose a copy of this worksheet with your order.*

Measurements:

Cover: Measure the inside diameter of the manhole cover at its base “A”. Measure the distance of the cover thickness “B”.

Frame: Measure the outside diameter of the frame where the cover sits “OD”. Measure the inside diameter of the frames lip “ID”.

For tapered frame and cover, please measure frame at closest point to the rim.

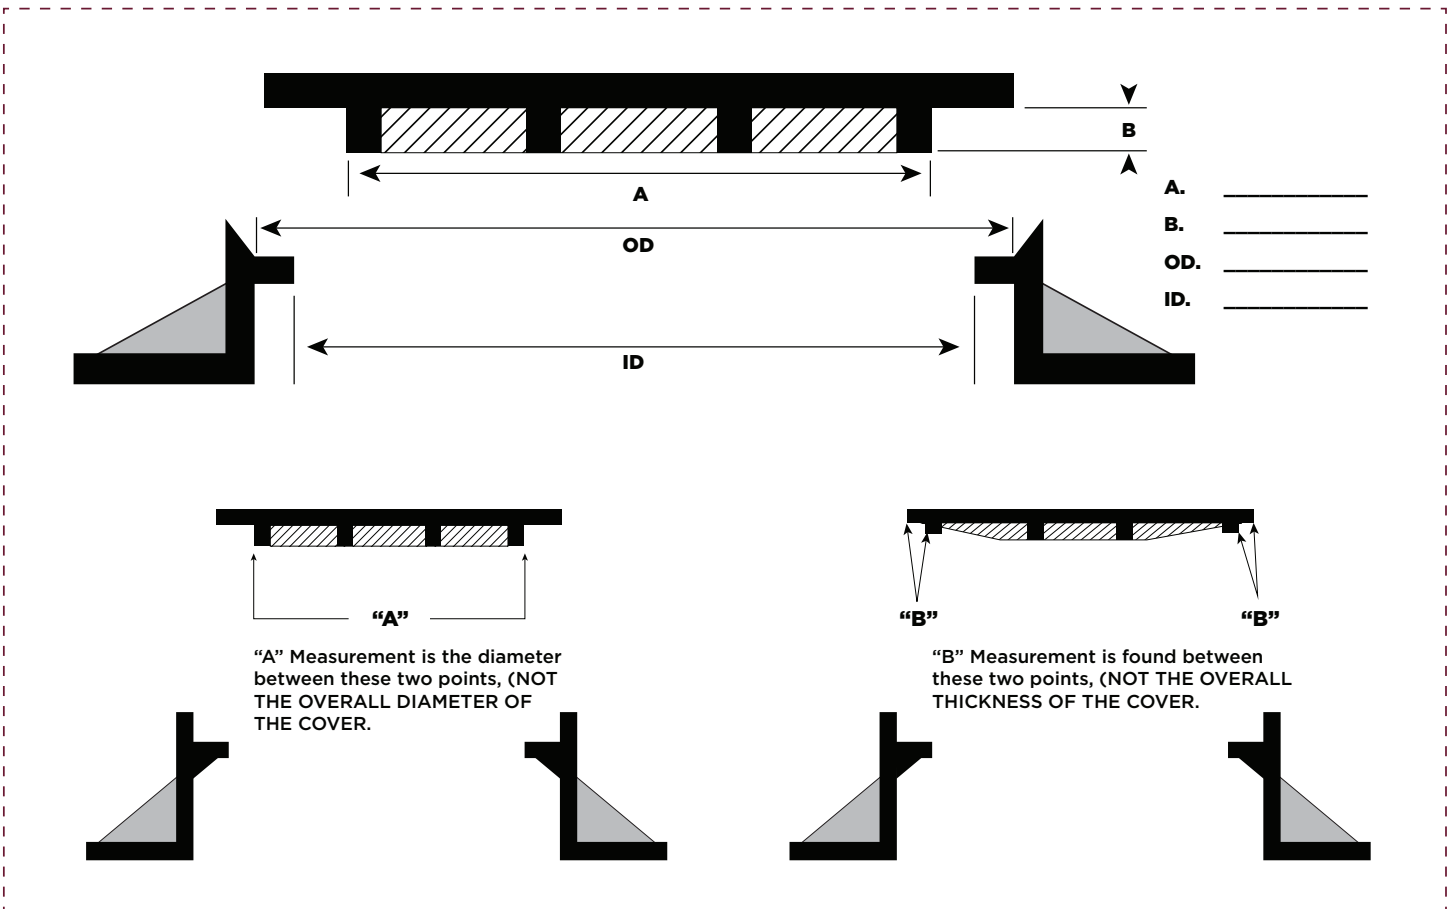

EMAIL: noflowinflow@gmail.com | FAX (210) 307-4482